
HEARTFELT™ LEVELS - FELT CEILINGS

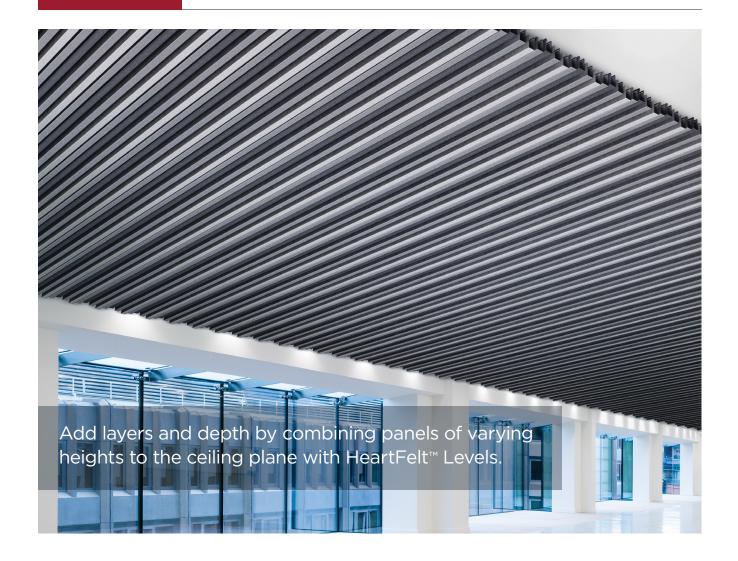


KEY FEATURES

- Modular ceiling system with felt panels
- Panel Width: 19/16"
- Panel: Depth: 2 ³/₁₆"
- Panel length: 8'
- Panel depth reveal: Up to 1"
- Varying heights and spaces allow for enhanced acoustics and unique custom visuals in a modular application


- Square-edge design
- Easy plenum access
- Interior applications
- Compatible with industry standard lighting, HVAC, speaker, fire safety, and security services
- Red Dot Award 2017 Winner Best of the Best
- Carrier modules for various depths and reveals

TYPICAL SECTION 12 ga hanger wire by others, typ. HeartFelt hanger assembly 23/8" HeartFelt Levels scatter carrier shown, see website for additional patterns


CONFIGURATIONS SUGGESTED



HeartFelt panel








, 13/16" reveal

2 ³/8" module



SCATTER

PHYSICAL DATA

Substrate: Non-woven PES fibers (felt)

Warranty: 1 year

Seismic rating: Zones A,B,C,D,E,F

Fire rating: Class A Fire Rated per ASTM E84 - Flame spread: ≤ 25, Smoke ≤ 300

Fire rating: Canada - per CAN/ULC S102.2-10

- Flame spread: = 5, Smoke = 90

Weight: Varies Wind load: N/A

Light reflectance: Varies with color selected Acoustical ratings - NRC: See Resources section.

LEED V4 CREDITS

MR: Building Product Disclosure **EQ:** Low-Emitting Materials

EQ: Indoor Air Quality Assessment

EQ: Acoustic Performance

CERTIFICATIONS

GREENGUARD Gold Certified Cradle-to-Cradle Bronze Certified Material Health Certified - Bronze

HEARTFELT™ LEVELS - FELT CEILINGS

COLORS & FINISHES

Please contact manufacturer for minimum quantities and lead times. See website for the most up to date information or to request samples. Colors are for illustration purposes only.

COLORS

HeartFelt - Greys



7593F













Middle Grey 7597F

Dark Grey 7598F

HeartFelt - Earth Tones


















Dark Brown 7578F

Umber 7579F

Given the unique and special nature of our HeartFelt™ ceiling product, steps should be taken (before and during installation, as well as over the lifetime of the ceiling) to avoid or minimize static and the accumulation of dust, lint, dirt or airborne particles on or around the felt. Manufacturer does not warrant against or take responsibility for any such static or accumulation.

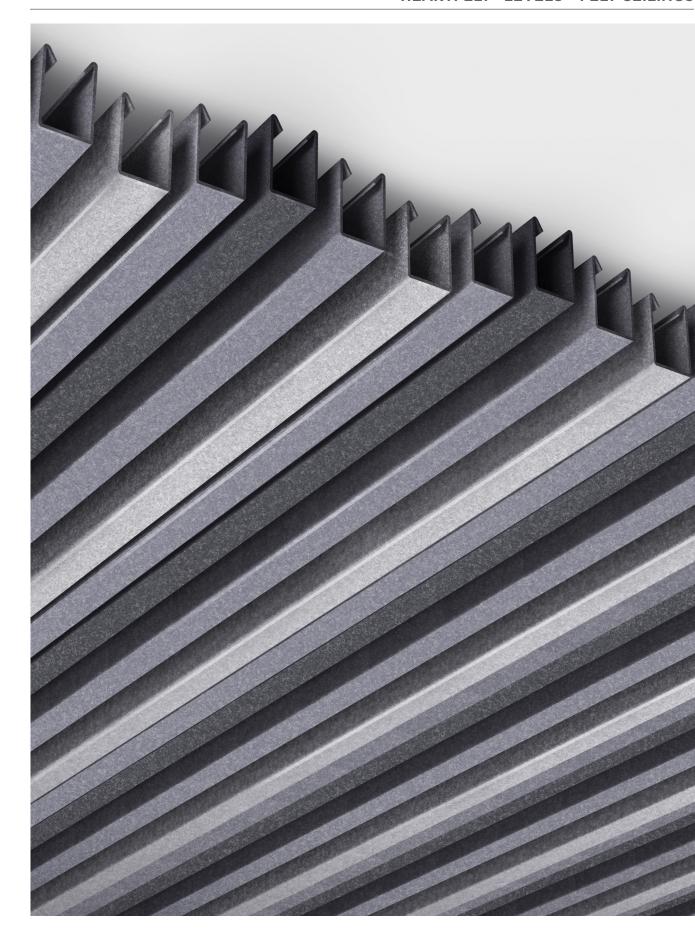

CTSpecialtyCeilings.com | 800.366.4327 800.366.4327 | CTSpecialtyCeilings.com